

Servo Motor Control Protocol

Applicable driver: V3

Version: V4.3

Date: 2025.05

Disclaimer

Thanks for choosing MYACTUATOR. Please read this statement carefully before using. Once used, this statement is deemed to be approved and accepted. Please install and use this product strictly in accordance with the manual, product description and relevant laws, regulations, policies and guidelines. In the process of using the product, the user undertakes to be responsible for his own behavior and all consequences arising therefrom. MYACTUATOR will not be liable for any loss caused by improper use, installation and modification of the user.

MYACTUATOR is the trademark of Suzhou Micro Actuator Technology Co., Ltd. and its affiliates. Product names, brands, etc. appearing in this document are trademarks or registered trademarks of their respective companies.

This product and manual are copyrighted by MYACTUATOR. Reproduction in any form is not permitted without permission. The final interpretation right of the disclaimer belongs to MYACTUATOR.

Catalog

1. Communication Bus Parameters and Message Format	1
1.1. CAN Bus	1
1.1.1. Parameters	1
1.1.2. Message Format.....	1
1.2. RS485 Bus	1
1.2.1. Parameters	1
1.2.2. Message Format.....	1
2. Single Motor Command Description.....	2
2.1. Read PID Parameter Command (0x30).....	2
2.1.1. Instruction Description	2
2.1.2. Send Data Field Definition	2
2.1.3. Reply Data Field Definition	2
2.1.4. Function Index Description	3
2.1.5. Communication Example	3
2.2. Write PID Parameters to RAM Command (0x31).....	4
2.2.1. Instruction Description	4
2.2.2. Send Data Field Definition	4
2.2.3. Reply Data Field Definition	4
2.2.4. Function Index Description	5
2.2.5. Communication Example	5
2.3. Write PID Parameters to ROM Command (0x32).....	6
2.3.1. Instruction Description	6
2.3.2. Send Data Field Definition	6
2.3.3. Reply Data Field Definition	6
2.3.4. Function Index Description	6
2.3.5. Communication Example	7
2.4. Read Acceleration Command (0x42)	8
2.4.1. Instruction Description	8
2.4.2. Send Data Field Definition	8
2.4.3. Reply Data Field Definition	8
2.4.4. Function Index Description	9
2.4.5. Communication Example	9
2.5. Write Acceleration to RAM and ROM Command (0x43).....	11

2.5.1. Instruction Description	11
2.5.2. Send Data Field Definition	11
2.5.3. Reply Data Field Definition	11
2.5.4. Function Index Description	11
2.5.5. Communication Example	12
2.6. Read Multi-Turn Encoder Position Data Command (0x60).....	15
2.6.1. Instruction Description	15
2.6.2. Send Data Field Definition	15
2.6.3. Reply Data Field Definition	16
2.6.4. Communication Example	16
2.7. Read Multi-Turn Encoder Original Position Data Command (0x61)	17
2.7.1. Instruction Description	17
2.7.2. Send Data Field Definition	17
2.7.3. Reply Data Field Definition	18
2.7.4. Communication Example	18
2.8. Read Multi-Turn Encoder Zero Offset Data Command (0x62)	19
2.8.1. Instruction Description	19
2.8.2. Send Data Field Definition	19
2.8.3. Reply Data Field Definition	20
2.8.4. Communication Example	20
2.9. Write Encoder Multi-Turn Value to ROM as Motor Zero Command (0x63)...	21
2.9.1. Instruction Description	21
2.9.2. Send Data Field Definition	21
2.9.3. Reply Data Field Definition	22
2.9.4. Communication Example	22
2.10. Write the Current Multi-Turn Position of the Encoder to the ROM as the Motor Zero Command (0x64)	23
2.10.1. Instruction Description	23
2.10.2. Send Data Field Definition	23
2.10.3. Reply Data Field Definition	23
2.10.4. Communication Example	24
2.11. Read Single-Turn Encoder Command (0x90)	25
2.11.1. Instruction Description	25
2.11.2. Send Data Field Definition	25


2.11.3. Reply Data Field Definition.....	25
2.11.4. Communication Example	26
2.12. Read Multi-Turn Angle Command (0x92)	27
2.12.1. Instruction Description	27
2.12.2. Send Data Field Definition	27
2.12.3. Reply Data Field Definition	27
2.12.4. Communication Example	28
2.13. Read Single-Turn Angle Command (0x94)	29
2.13.1. Instruction Description	29
2.13.2. Send Data Field Definition	29
2.13.3. Reply Data Field Definition	29
2.13.4. Communication Example	30
2.14. Read Motor Status 1 and Error Flag Command (0x9A).....	31
2.14.1. Instruction Description	31
2.14.2. Send Data Field Definition	31
2.14.3. Reply Data Field Definition	31
2.14.4. Communication Example	32
2.15. Read Motor Status 2 Command (0x9C)	33
2.15.1. Instruction Description	33
2.15.2. Send Data Field Definition	34
2.15.3. Reply Data Field Definition	34
2.15.4. Communication Example	34
2.16. Read Motor Status 3 Command (0x9D)	36
2.16.1. Instruction Description	36
2.16.2. Send Data Field Definition	36
2.16.3. Reply Data Field Definition	36
2.16.4. Communication Example	37
2.17. Motor Shutdown Command (0x80).....	38
2.17.1. Instruction Description	38
2.17.2. Send Data Field Definition	38
2.17.3. Reply Data Field Definition	38
2.18. Motor Stop Command (0x81)	39
2.18.1. Instruction Description	39
2.18.2. Send Data Field Definition	39

2.18.3. Reply Data Field Definition	39
2.19. Torque Closed-Loop Control Command (0xA1).....	39
2.19.1. Instruction Description	39
2.19.2. Send Data Field Definition	39
2.19.3. Reply Data Field Definition	40
2.19.4. Communication Example	40
2.20. Speed Closed-Loop Control Command (0xA2)	43
2.20.1. Instruction Description	43
2.20.2. Send Data Field Definition	43
2.20.3. Reply Data Field Definition	44
2.20.4. Communication Example	45
2.21. Absolute Position Closed-Loop Control Command (0xA4)	47
2.21.1. Instruction Description	47
2.21.2. Send Data Field Definition	48
2.21.3. Reply Data Field Definition	48
2.21.4. Communication Example	49
2.22. Single-Turn Position Control Command (0xA6)	52
2.22.1. Instruction Description	52
2.22.2. Send Data Field Definition	52
2.22.3. Reply Data Field Definition	52
2.22.4. Communication Example	53
2.23. Incremental Position Closed-Loop Control Command (0xA8).....	56
2.23.1. Instruction Description	56
2.23.2. Send Data Field Definition	56
2.23.3. Reply Data Field Definition	56
2.23.4. Communication Example	57
2.24. Force Control Position Closed-Loop Command (0xA9).....	60
2.24.1. Instruction Description	60
2.24.2. Send Data Field Definition	60
2.24.3. Reply Data Field Definition	61
2.24.4. Communication Example	61
2.25. System Operating Mode Acquisition (0x70)	64
2.25.1. Instruction Description	64
2.25.2. Send Data Field Definition	64

2.25.3. Reply Data Field Definition	64
2.25.4. Communication Example	65
2.26. System Reset Command (0x76)	66
2.26.1. Instruction Description	66
2.26.2. Send Data Field Definition	66
2.26.3. Reply Data Field Definition	66
2.26.4. Communication Example	66
2.27. System Brake Release Command (0x77)	67
2.27.1. Instruction Description	67
2.27.2. Send Data Field Definition	67
2.27.3. Reply Data Field Definition	67
2.28. System Brake Lock Command (0x78)	68
2.28.1. Instruction Description	68
2.28.2. Send Data Field Definition	68
2.28.3. Reply Data Field Definition	68
2.29. System Runtime Read Command (0xB1)	68
2.29.1. Instruction Description	68
2.29.2. Send Data Field Definition	68
2.29.3. Reply Data Field Definition	69
2.29.4. Communication Example	69
2.30. System Software Version Date Read Command (0xB2)	70
2.30.1. Instruction Description	70
2.30.2. Send Data Field Definition	70
2.30.3. Reply Data Field Definition	70
2.30.4. Communication Example	71
2.31. Communication Interruption Protection Time Setting Command (0xB3)	72
2.31.1. Instruction Description	72
2.31.2. Send Data Field Definition	72
2.31.3. Reply Data Field Definition	72
2.31.4. Communication Example	73
2.32. Communication Baud Rate Setting Command (0xB4)	74
2.32.1. Instruction Description	74
2.32.2. Send Data Field Definition	75
2.32.3. Reply Data Field Definition	75

2.32.4. Communication Example	75
2.33. Motor Model Reading Command (0xB5)	76
2.33.1. Instruction Description	76
2.33.2. Send Data Field Definition	77
2.33.3. Reply Data Field Definition	77
2.33.4. Communication Example	77
2.34. Active Reply Function Command (0xB6)	78
2.34.1. Instruction Description	78
2.34.2. Send Data Field Definition	78
2.34.3. Reply Data Field Definition	79
2.34.4. Example of Communication	79
2.35. Function Control Command (0x20)	79
2.35.1. Instruction Description	79
2.35.2. Send Data Field Definition	79
2.35.3. Reply Data Field Definition	80
2.35.4. Function Index Description	80
2.35.5. Communication Example	81
3. CAN Multi-Motor Command (0x280 + Command)	83
3.1. Instruction Description	83
3.2. Communication Example	83
4. CANID Setting Command (0x79)	86
4.1. Instruction Description	86
4.2. Send Data Field Definition	86
4.3. Reply Data Field Definition	86
4.4. Communication Example	87
5. Motion Mode Control Command_CAN (0x400 + ID)	88
5.1. Instruction Description	88
5.2. Send Data Field Definition (Big-endian byte order)	89
5.3. Reply Data Field Definition (Big-endian byte order)	89
5.4. Communication Example	90
6. RS485 Multi-Motor Command (0xCD + Command)	92
6.1. Instruction Description	92
6.2. Communication Example	92
7. RS485-ID Setting Command (0x79)	95

7.1. Instruction Description	95
7.2. Send Data Field Definition	95
7.3. Reply Data Field Definition	95
7.4. Communication Example	96
8. Indicator Light Description	97
8.1. Status Description.....	97
8.2. Failure Description Form	97
9. Version Revision Information	98

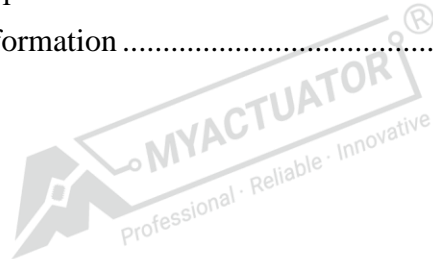

1. Communication Bus Parameters and Message Format

1.1. CAN Bus

1.1.1. Parameters

Bus interface: CAN

Baud rate: 1Mbps

1.1.2. Message Format

Identifier: Single motor command sending: $0x140 + ID(1\sim32)$

Multi-motor command sending: $0x280$

Reply: $0x240 + ID(1\sim32)$

Frame format: Data frame

Frame Type: Standard Frame

DLC: 8 bytes

1.2. RS485 Bus

1.2.1. Parameters

Bus interface: RS485

Baudrate: 115200bps, 500Kbps, 1Mbps, 1.5Mbps, 2.5Mbps

Serial port configuration: 8 data bits, 1 stop bit, no parity bit

1.2.2. Message Format

Type	Data Definition	Bytes	Description
Frame header	0x3E	1	Communication frame header, used for identification.
ID	1~32	1	Device address, corresponding to the ID number of each motor.
Data Length	Data Length	1	The length of the data field. In the standard protocol, the length is fixed to 8 bytes.
Data field	Data	According	The content of the data field in the standard

	content	to the length	protocol is exactly the same as that of the CAN.
Check	CRC Check	2	CRC16 check,low order first,high order last.

2. Single Motor Command Description

2.1. Read PID Parameter Command (0x30)

2.1.1. Instruction Description

This command can read the PID parameters of the current,speed and position,the data type is Float,determined by the index value. For details,see 2.1.4 Index description table.

2.1.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x30
DATA[1]	Parameter index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.1.3. Reply Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x30
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Parameter low byte 1	DATA[4] = (uint8_t)(Value)
DATA[5]	Parameter byte 2	DATA[5] = (uint8_t) (Value>>8)
DATA[6]	Parameter byte 3	DATA[6] = (uint8_t)(Value>>16)

DATA[7]	Parameter byte 4	DATA[7] = (uint8_t)(Value>>24)
---------	------------------	--------------------------------

2.1.4. Function Index Description

Index	Parameter
0x01	Current loop KP parameter
0x02	Current loop KI parameter
0x04	Speed loop KP parameter
0x05	Speed loop KI parameter
0x07	Position loop KP parameter
0x08	Position loop KI parameter
0x09	Position loop KD parameter

2.1.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x30	0x01	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x30	0x01	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

According to the index value table, Data[1] = 0x01, it means the current loop KP and indicates the read current loop KP parameter.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x30	0x01	0x00	0x00	0x00	0x00	0x80	0x3F

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x30	0x01	0x00	0x00	0x00	0x00	0x80	0x3F	CRC16L	CRC16H

Description:

In the frame data returned, Data[1]=0x01, it means the current loop KP parameter. From Data[4] to Data[7], these form a 32-bit data that is 0x3F800000, (Data[4] is the lowest bit, Data[7] is the highest bit), and the data type is Float. When convert it to decimal, the data is 1.0, this means that the current loop KP parameter at this time is 1.0.

The online conversion website can be used: <http://www.speedfly.cn/tools/hexconvert/>.

2.2. Write PID Parameters to RAM Command (0x31)

2.2.1. Instruction Description

This command can write the parameters of current, speed, position loop KP and KI to RAM at one time, and it will not be saved after power off. The data type is Float, and it is determined by the index value. For details, see 2.2.4 Index Description Table. Be careful to avoid writing parameters when the motor has just started and is in motion.

2.2.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x31
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Parameter low byte 1	DATA[4] = (uint8_t)(Value)
DATA[5]	Parameter byte 2	DATA[5] = (uint8_t)(Value >> 8)
DATA[6]	Parameter byte 3	DATA[6] = (uint8_t)(Value >> 16)
DATA[7]	Parameter byte 4	DATA[7] = (uint8_t)(Value >> 24)

2.2.3. Reply Data Field Definition

The content of the reply data is the same as the sent data.

2.2.4. Function Index Description

Index	Parameter
0x01	Current loop KP parameter
0x02	Current loop KI parameter
0x04	Speed loop KP parameter
0x05	Speed loop KI parameter
0x07	Position loop KP parameter
0x08	Position loop KI parameter
0x09	Position loop KD parameter

2.2.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x31	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x31	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F	CRC16L	CRC16H

Description:

Data[1] = 0x01, and it means the current loop KP parameter. From Data[4] to Data[7], these form a 32-bit data that is 0x3FC00000, (Data[4] is the lowest bit, Data[7] is the highest bit), and the data type is Float. When convert it to decimal, the data value is 1.5, this means that the current loop KP parameter is set to 1.5 and written to the RAM of the motor drive. In addition, the parameter is not saved after power off.

The online conversion website can be used: <http://www.speedfly.cn/tools/hexconvert/>.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x31	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x31	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F	CRC16L	CRC16H

2.3. Write PID Parameters to ROM Command (0x32)

2.3.1. Instruction Description

This command can write the parameters of current, speed, position loop KP and KI to ROM at one time, which can be saved after power off. The data type is Float and can be determined by the index value, as detailed in 2.2.4 Index Description. Be careful to avoid writing parameters when the motor has just started and is in motion.

2.3.2. Send Data Field Definition

Data Field	Description	Data
DATA[0]	Command byte	0x32
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Parameter low byte 1	DATA[4] = (uint8_t)(Value)
DATA[5]	Parameter byte 2	DATA[5] = (uint8_t)(Value>>8)
DATA[6]	Parameter byte 3	DATA[6] = (uint8_t)(Value>>16)
DATA[7]	Parameter byte 4	DATA[7] = (uint8_t)(Value>>24)

2.3.3. Reply Data Field Definition

The content of the reply data is the same as the sent data.

2.3.4. Function Index Description

Index	Parameter
0x01	Current loop KP parameter

0x02	Current loop KI parameter
0x04	Speed loop KP parameter
0x05	Speed loop KI parameter
0x07	Position loop KP parameter
0x08	Position loop KI parameter
0x09	Position loop KD parameter

2.3.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x32	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x32	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F	CRC16L	CRC16H

Description:

Data[1] = 0x01, and it means the current loop KP parameter. From Data[4] to Data[7], these form a 32-bit data that is 0x3FC00000, (Data[4] is the lowest bit, Data[7] is the highest bit), and the data type is Float. When convert it to decimal, the data value is 1.5, this means that the current loop KP parameter is set to 1.5 and written to the ROM of the motor drive. In addition, the parameter is saved after the power is off.

The online conversion website can be used: <http://www.speedfly.cn/tools/hexconvert/>.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x32	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x32	0x01	0x00	0x00	0x00	0x00	0xC0	0x3F	CRC16L	CRC16H

2.4. Read Acceleration Command (0x42)

2.4.1. Instruction Description

The host sends this command to read the acceleration parameters of the current motor.

2.4.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x42
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.4.3. Reply Data Field Definition

The acceleration parameter is included in the drive response data. Acceleration data Accel is int32_t type, the unit is 1dps/s, and the parameter range is 100-60000.

Data field	Description	Data
DATA[0]	Command byte	0x42
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Acceleration low byte 1	DATA[4] = (uint8_t)(Accel)
DATA[5]	Acceleration byte 2	DATA[5] = (uint8_t)(Accel>>8)
DATA[6]	Acceleration byte 3	DATA[6] = (uint8_t)(Accel>>16)
DATA[7]	Acceleration byte 4	DATA[7] = (uint8_t)(Accel>>24)

2.4.4. Function Index Description

Index value	Command name	Function description
0x00	Position planning acceleration	Acceleration value from initial velocity to maximum velocity in position planning
0x01	Position planning deceleration	Deceleration value from maximum velocity to standstill in position planning
0x02	Speed planning acceleration	The acceleration value from the current speed to the target speed, including the acceleration in the positive and negative directions
0x03	Speed planning deceleration	The deceleration value to decelerate from the current velocity to the target velocity in the same direction

2.4.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x42	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x42	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: Send a command to read the position planning acceleration.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x42	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x42	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 0x00, indicating the position planning acceleration value.

Data[4] to data[7] form one (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x00002710, which means 10000 in decimal. It means that the acceleration of the motor position loop is 10000dps/s.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x42	0x01	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x42	0x01	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: Send a command to read the position planning deceleration.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x42	0x01	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x42	0x01	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 0x01, indicating the position planning deceleration value.

Data[4] to data[7] form a (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x00002710, which means 10000 in decimal. It means that the deceleration of the motor position loop is 10000dps/s.

2.5. Write Acceleration to RAM and ROM Command (0x43)

2.5.1. Instruction Description

The host sends this command to write the acceleration into the RAM and ROM, which can be saved after power off. Acceleration data Accel is uint32_t type, the unit is 1dps/s, and the parameter range is 100-60000. The command contains the acceleration and deceleration values in the position and velocity planning, which are determined by the index value. For details, see the index description table in 2.5.4. Be careful to avoid writing parameters when the motor has just started and is in motion.

2.5.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x43
DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Acceleration low byte 1	DATA[4] = (uint8_t)(Accel)
DATA[5]	Acceleration byte 2	DATA[5] = (uint8_t)(Accel>>8)
DATA[6]	Acceleration byte 3	DATA[6] = (uint8_t)(Accel>>16)
DATA[7]	Acceleration byte 4	DATA[7] = (uint8_t)(Accel>>24)

2.5.3. Reply Data Field Definition

The motor will reply to the host after receiving the command, and the reply command is the same as the received command.

2.5.4. Function Index Description

Index value	Command name	Function description
0x00	position planning acceleration	Acceleration value from initial velocity to maximum velocity in position planning

0x01	Position planning deceleration	Deceleration value from maximum speed to stop in position planning
0x02	Speed planning acceleration	The acceleration value from the current speed to the target speed, including the acceleration in the forward and reverse directions
0x03	Speed planning deceleration	In the same direction, the deceleration value from the current speed to the target speed

2.5.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x43	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 0x00, indicating the position planning acceleration value. Data[4] to data[7] form one 32-bit data is 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. It indicates that the position planning acceleration of 10000dps/s is written to the motor driver, and the value can be saved after the power is turned off.

Reply command:

CAN:

ID 号	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x43	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: The motor replies to the host after receiving the command, and the reply command is the same as the received command.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x43	0x01	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x01	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 0x01, indicating the deceleration value of position planning. Data[4] to data[7] form a 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. Indicates that the position planning deceleration of 10000dps/s is written to the motor driver, and the value can be saved after the power is turned off.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x43	0x01	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x01	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: The motor replies to the host computer after receiving the command, and

the reply command is the same as the received command.

Example 3:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x43	0x02	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x02	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: Data[1] is 0x02, which indicates the acceleration value of speed planning. Data[4] to data[7] form a 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. Indicates that the speed planning acceleration of 10000dps/s is written to the motor driver, and the value can be saved after power off.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x43	0x02	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x02	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: The motor replies to the host after receiving the command, and the reply command is the same as the received command.

Example 4:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x43	0x03	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x03	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: Data[1] is 0x03, indicating the speed planning deceleration value. Data[4] to data[7] form one 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. Indicates that the speed planning deceleration of 10000dps/s is written to the motor driver, and the value can be saved after the power is turned off.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x43	0x03	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x43	0x03	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: The motor replies to the host after receiving the command, and the reply command is the same as the received command.

2.6. Read Multi-Turn Encoder Position Data Command (0x60)

2.6.1. Instruction Description

The host sends this command to read the multi-turn position of the encoder, which represents the rotation angle of the motor output shaft.

2.6.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x60

DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.6.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters. Encoder multi-turn position encoder (int32_t type, value range of multi-turn encoder, 4 bytes of valid data), which is the value after subtracting the encoder's multi-turn zero offset (initial position) from the original position of the encoder.

Data field	Description	Data
DATA[0]	Command byte	0x60
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Encoder position low byte 1	DATA[4] = (uint8_t)(encoder)
DATA[5]	Encoder position byte 2	DATA[5] = (uint8_t)(encoder>>8)
DATA[6]	Encoder position byte 3	DATA[6] = (uint8_t)(encoder>>16)
DATA[7]	Encoder position byte 4	DATA[7] = (uint8_t)(encoder>>24)

2.6.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x60	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x60	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

The host sends this command to read the multi-turn position of the encoder.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x60	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x60	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description: Data[4] to data[7] form one 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 10000 pulses.

2.7. Read Multi-Turn Encoder Original Position Data Command (0x61)

2.7.1. Instruction Description

The host sends this command to read the multi-turn encoder home position, i.e. the multi-turn encoder value without the zero offset (home position).

2.7.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x61
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00

DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.7.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters. Encoder multi-turn raw position encoderRaw (int32_t type, value range, valid data 4 bytes).

Data field	Description	Data
DATA[0]	Command byte	0x61
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Encoder original position byte 1	DATA[4] = (uint8_t)(encoderRaw)
DATA[5]	Encoder original position byte 2	DATA[5] = (uint8_t)(encoderRaw>>8)
DATA[6]	Encoder original position byte 3	DATA[6] = (uint8_t)(encoderRaw>>16)
DATA[7]	Encoder original position byte 4	DATA[7] = (uint8_t)(encoderRaw>>24)

2.7.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x61	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0x61	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

The host sends this command to read the original position of the encoder multi-turn.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x61	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x61	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form a 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. Indicates that the current multi-turn encoder value of the motor is 10000 pulses, excluding the zero offset (initial position).

2.8. Read Multi-Turn Encoder Zero Offset Data Command (0x62)

2.8.1. Instruction Description

The host sends this command to read the multi-turn zero offset value (initial position) of the encoder.

2.8.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x62
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00

DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.8.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters. Encoder multi-turn zero offset encoderOffset (int32_t type, value range, valid data 4 bytes).

Data field	Description	Data
DATA[0]	Command byte	0x62
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Encoder offset byte 1	DATA[4] = (uint8_t)(encoderOffset)
DATA[5]	Encoder offset byte 2	DATA[5] = (uint8_t)(encoderOffset>>8)
DATA[6]	Encoder offset byte 3	DATA[6] = (uint8_t)(encoderOffset>>16)
DATA[7]	Encoder offset byte 4	DATA[7] = (uint8_t)(encoderOffset>>24)

2.8.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x62	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x62	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

The host sends this command to read the multi-turn zero offset value of the encoder.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x62	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x62	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form one 32-bit data, 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. It indicates that the current multi-turn encoder zero offset value of the motor is 10000 pulses.

2.9. Write Encoder Multi-Turn Value to ROM as Motor Zero Command (0x63)

2.9.1. Instruction Description

The host sends this command to set the zero offset (initial position) of the encoder, where the encoder multi-turn value to be written, `encoderOffset`, is of type `int32_t`, (value range, 4 bytes of valid data). Be careful to avoid writing parameters when the motor has just started and is in motion.

Note: After writing the position of the new zero point, the motor needs to be restarted to be effective. Because of the change of the zero offset, the new zero offset (initial position) should be used as a reference when setting the target position.

2.9.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x63
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Encoder zero bias low byte 1	DATA[4] = (uint8_t)(encoderOffset)
DATA[5]	Encoder zero bias byte 2	DATA[5] = (uint8_t)(encoderOffset >> 8)

DATA[6]	Encoder zero bias byte 3	DATA[6] = (uint8_t)(encoderOffset>>8)
DATA[7]	Encoder zero bias byte 4	DATA[7] = (uint8_t)(encoderOffset>>8)

2.9.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as the command sent by the host.

2.9.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x63	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x63	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form one 32-bit data is 0x00002710, (Data[4] is the lowest bit, Data[7] is the highest bit), which means 10000 in decimal. It means to write 10000 pulses as multi-turn encoder zero offset.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x63	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x63	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

The motor replies to the host after receiving the command, and the frame data is the same as the command sent by the host.

2.10. Write the Current Multi-Turn Position of the Encoder to the ROM as the Motor Zero Command (0x64)

2.10.1. Instruction Description

Write the current encoder position of the motor as the multi-turn encoder zero offset (initial position) into the ROM.

Note: After writing the new zero point position, you need to send 0x76 (system reset command) to restart the system to be effective. Because of the change of the zero offset, the new zero offset (initial position) should be used as a reference when setting the target position.

2.10.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x64
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.10.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the encoderOffset in the data is the set zero offset value.

Data field	Description	Data
DATA[0]	Command byte	0x64
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00

DATA[3]	NULL	0x00
DATA[4]	Encoder zero bias low byte 1	DATA[4] = (uint8_t)(encoderOffset)
DATA[5]	Encoder zero bias byte 2	DATA[5] = (uint8_t)(encoderOffset>>8)
DATA[6]	Encoder zero bias byte 3	DATA[6] = (uint8_t)(encoderOffset>>16)
DATA[7]	Encoder zero bias byte 4	DATA[7] = (uint8_t)(encoderOffset>>24)

2.10.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x64	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x64	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the 0x64 command, the motor will write the current multi-turn encoder value as the zero offset (initial position) into the ROM.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x64	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x64	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form a 32-bit data(Data[4] is the lowest bit,Data[7] is the highest

bit),0x00002710,which means 10000 in decimal. Indicates that the multi-turn zero offset value (initial position) written to the motor is 10,000 pulses.

2.11. Read Single-Turn Encoder Command (0x90)

2.11.1. Instruction Description

The host sends this command to read the current position of the encoder. Note that the current command is used as a single-turn data reading command for direct drive motors.

2.11.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x90
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.11.3. Reply Data Field Definition

The motor replies to the host after receiving the command,and the frame data contains the following parameters.

1. Encoder position encoder,the value after subtracting the encoder's zero offset from the original position of the encoder;
2. Encoder original position: encoderRaw;
3. Encoder's zero offset: encoderOffset,this point serves as the zero point of the motor angle.

Data field	Description	Data
DATA[0]	Command byte	0x90
DATA[1]	NULL	0x00
DATA[2]	Encoder position low byte	DATA[1] = (uint8_t)(encoder)

DATA[3]	Encoder position high byte	DATA[2] = (uint8_t)(encoder>>8)
DATA[4]	Encoder original position low byte	DATA[3] = (uint8_t)(encoderRaw)
DATA[5]	Encoder original position high byte	DATA[4] = (uint8_t)(encoderRaw>>8)
DATA[6]	Encoder zero bias low byte	DATA[5] = (uint8_t)(encoderOffset)
DATA[7]	Encoder zero bias high byte	DATA[6] = (uint8_t)(encoderOffset>>8)

2.11.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x90	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x90	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the 0x90 command, it will return the motor single-turn encoder value.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x90	0x00	0x33	0x08	0xBE	0x2C	0x8B	0x24

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x90	0x00	0x33	0x08	0xBE	0x2C	0x8B	0x24	CRC16L	CRC16H

Description:

Data[2] to data[3] form a 16-bit data, 0x0833, (Data[2] is the lowest bit, Data[3] is the

highest), which means 2099 in decimal, which means that the current position of the encoder relative to the zero offset of the motor is 2099 pulses. Data[4] to data[5] make up one (Data[4] is the lowest bit, Data[5] is the highest bit) 16-bit data is 0x2CBE, which means 11454 in decimal, which means that the current encoder original position of the motor is 11454 pulse. Data[6] to data[7] form one 16-bit data is 0x248B, (Data[6] is the lowest bit, Data[7] is the highest bit), which means 9355 in decimal, which means that the zero offset position of the motor is 9355 pulse.

2.12. Read Multi-Turn Angle Command (0x92)

2.12.1. Instruction Description

The host sends this command to read the current multi-turn absolute angle value of the motor.

2.12.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x92
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.12.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor angle motorAngle, (int32_t type, value range, valid data 4 bytes), unit 0.01°/LSB.

Data field	Description	Data
DATA[0]	Command byte	0x92

DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Angle low byte 1	DATA[4] = (uint8_t)(motorAngle)
DATA[5]	Angle byte 2	DATA[5] = (uint8_t)(motorAngle>>8)
DATA[6]	Angle byte 3	DATA[6] = (uint8_t)(motorAngle>>16)
DATA[7]	Angle byte 4	DATA[7] = (uint8_t)(motorAngle>>24)

2.12.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x92	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x92	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the 0x92 command, it will return the absolute angle of the motor output shaft.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x92	0x00	0x00	0x00	0xA0	0x8C	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x92	0x00	0x00	0x00	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form one 32-bit data, it is 0x00008CA0, (Data[4] is the lowest bit, Data[7] is the highest bit), which means the decimal is 36000, which is reduced by 100 times in units of 0.01°/LSB. That is $36000 \times 0.01 = 360^\circ$. Indicates that the motor output shaft moves 360° in the positive direction relative to the zero position.

2.13. Read Single-Turn Angle Command (0x94)

2.13.1. Instruction Description

The host sends this command to read the current single-turn angle of the motor.

2.13.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x94
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.13.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. The single circle angle of the motor, circleAngle, is int16_t type data, starting from the zero point of the encoder, increasing clockwise, and returning to 0 when it reaches the zero point again, the unit is 0.01°/LSB, and the value range is 0~35999.

Data field	Description	Data
DATA[0]	Command byte	0x94
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00

DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	Single circle angle low byte	DATA[5] = (uint8_t)(circleAngle)
DATA[7]	Single circle angle high byte	DATA[6] = (uint8_t)(circleAngle>>8)

2.13.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x94	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x94	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the 0x94 command, it will return the motor single-turn angle.

Reply command:.

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x94	0x00	0x00	0x00	0x00	0x00	0x10	0x27

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x94	0x00	0x00	0x00	0x00	0x00	0x10	0x27	CRC16L	CRC16H

Description:

Data[6] to data[7] form one (Data[6] is the lowest bit, Data[7] is the highest bit) 16-bit data is 0x2710, which means is 10000 in decimal, and the unit is 0.01°. Indicates that the

motor is currently at 100° relative to the zero position.

2.14. Read Motor Status 1 and Error Flag Command (0x9A)

2.14.1. Instruction Description

This command reads the current motor temperature, voltage and error status flags.

2.14.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x9A
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.14.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters:

1. Motor temperature temperature (uint8_t type, unit 1°C/LSB);
2. Brake control command: Indicates the state of the brake control command, 1 represents the brake release command, and 0 represents the brake lock command;
3. Voltage (uint16_t type, unit 0.1V/LSB);
4. Error flag errorState (of type uint16_t, each bit represents a different motor state).

Data field	Description	Data
DATA[0]	Command byte	0x9A
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	MOS temperature	DATA[2] = (uint8_t)(motorMOS temperature)
DATA[3]	Brake release command	DATA[3] = (uint8_t)(RlyCtrlRslt)
DATA[4]	Voltage low byte	DATA[4] = (uint8_t)(voltage)

DATA[5]	Voltage high byte	DATA[5] = (uint8_t)(voltage>>8)
DATA[6]	Error status low byte 1	DATA[6] = (uint8_t)(errorState)
DATA[7]	Error status byte 2	DATA[7] = (uint8_t)(errorState>>8)

Remark:

1. System abnormal state value System_errorState state table 1 is as follows:

System_errorState	Status Description
0x0002	Motor stall
0x0004	Low voltage
0x0008	Over voltage
0x0010	Over current
0x0040	Power overrun
0x0080	Calibration parameter writing error
0x0100	Speeding
0x0800	Component Overtemperature
0x1000	Motor temperature over temperature
0x2000	Encoder calibration error
0x4000	Encoder Data Error

2. When multiple errors occur at the same time, the error status bits will be displayed superimposed. For example, if the number 0x0016 appears, it means the addition of 0x2+0x4+0x10, which means that there are three errors such as motor stall, low voltage, and phase current over current.

2.14.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x9A	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9A	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the 0x9A command, the temperature, voltage and error status flags of the motor will be returned.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x9A	0x32	0x00	0x01	0xE5	0x01	0x04	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9A	0x32	0x00	0x01	0xE5	0x01	0x04	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. Data[3] indicates that the brake indicates the state of the brake control command, 1 represents the brake release command, and 0 represents the brake lock command. So 0x01 indicates that the current brake release command has been executed. Data[4] and Data[5] (Data[4] is the low bit, Data[5] is the high bit) form 0x01E5, the decimal is 485, which is reduced by 10 times according to the unit of 0.1V/LSB, $485 \times 0.1 = 48.5V$, representing The current motor supply voltage is 48.5V. Data[6] and Data[7] (Data[6] is low and Data[7] is high) form 0x0004, which indicates a low-voltage error according to the error description in the System_errorState table.

2.15. Read Motor Status 2 Command (0x9C)

2.15.1. Instruction Description

This command reads the temperature, speed and encoder position of the current motor.

2.15.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x9C
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.15.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor temperature (int8_t type, 1°C/LSB);
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB);
3. Motor output shaft speed (int16_t type, 1dps/LSB);
4. Motor output shaft angle (int16_t type, 1degree/LSB, maximum range ±32767degree).

Data field	Description	Data
DATA[0]	Command byte	0x9C
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.15.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x9C	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9C	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

This command reads the current temperature, speed and encoder position of the motor.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x9C	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9C	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3] 0x0064 is 100 in decimal, and it is $100 \times 0.01 = 1A$ when scaled down by 100 times, which means that the actual current of the current motor is 1A. The composite data 0x01F4 of Data[4] and Data[5] is 500 in decimal, which means the motor output shaft speed is 500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0x002D is 45 in decimal, which means that the motor output shaft moves 45 degrees in the positive direction relative to the zero position. The position of the motor output shaft is related to the number of lines of the motor encoder and the

reduction ratio. For example, if the number of lines of the motor encoder is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

2.16. Read Motor Status 3 Command (0x9D)

2.16.1. Instruction Description

This command reads the current motor temperature and phase current data.

2.16.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x9D
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.16.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following data:

1. Motor temperature (int8_t type, 1°C/LSB);
2. Phase A current data, the data type is int16_t, and the corresponding actual phase current is 0.01ALSB;
3. B-phase current data, the data type is int16_t type, and the corresponding actual phase current is 0.01ALSB;
4. C-phase current data, the data type is int16_t type, and the corresponding actual phase current is 0.01ALSB.

Data field	Description	Data
DATA[0]	Command byte	0x9D

DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Phase A current low byte	DATA[2] = (uint8_t)(iA)
DATA[3]	Phase A current high byte	DATA[3] = (uint8_t)(iA>>8)
DATA[4]	Phase B current low byte	DATA[4] = (uint8_t)(iB)
DATA[5]	Phase B current high byte	DATA[5] = (uint8_t)(iB>>8)
DATA[6]	Phase C current low byte	DATA[6] = (uint8_t)(iC)
DATA[7]	Phase C current high byte	DATA[7] = (uint8_t)(iC>>8)

2.16.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x9D	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9D	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

This command reads the current motor temperature and phase current data.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x9D	0x32	0xC2	0x0B	0x10	0xFA	0xC0	0xF9

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x9D	0x32	0xC2	0x0B	0x10	0xFA	0xC0	0xF9	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data 0x0BC2 of Data[2] and Data[3] is 3010 in decimal, and it is $3010 \times 0.01 = 30.1A$ when scaled down by 100 times, which means that the actual current of the current phase A of the motor is 30.1A. The composite data 0xFA10 of Data[4] and Data[5] is -1520 in decimal, and it is $-1520 \times 0.01 = -15.2A$ when scaled down by 100 times, which means that the actual current of the current phase B of the motor is -15.2A. The composite data 0xF9C0 of Data[6] and Data[7] is -1600 in decimal, and it is $-1600 \times 0.01 = -16A$ when scaled down by 100 times, which means that the actual current of the current phase C of the motor is -16A.

2.17. Motor Shutdown Command (0x80)

2.17.1. Instruction Description

Turns off the motor output and also clears the motor running state, not in any closed loop mode.

2.17.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x80
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.17.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as that sent by the host.

2.18. Motor Stop Command (0x81)

2.18.1. Instruction Description

Stop the motor, the closed-loop mode where the motor is still running, just stop the motor speed.

2.18.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x81
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.18.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as that sent by the host

2.19. Torque Closed-Loop Control Command (0xA1)

2.19.1. Instruction Description

This command is a control command, which can be run when the motor is not faulty. The host sends this command to control the torque and current output of the motor. The control value iqControl is of type int16_t and the unit is 0.01A/LSB.

For safety reasons, this command cannot open the brake directly. But, you can use the 0x77 command to open the brake first, then you can use A1 command.

2.19.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA1
DATA[1]	NULL	0x00

DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Torque current control value low byte	DATA[4] = (uint8_t)(iqControl)
DATA[5]	Torque current control value high byte	DATA[5]=(uint8_t)(iqControl>>8)
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.19.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor temperature (int8_t type, 1°C/LSB).
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB).
3. Motor output shaft speed (int16_t type, 1dps/LSB).
4. Motor output shaft angle (int16_t type, 1degree/LSB, maximum range ±32767degree).

Data field	Description	Data
DATA[0]	Command byte	0xA1
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.19.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
----	---------	---------	---------	---------	---------	---------	---------	---------

0x141	0xA1	0x00	0x00	0x00	0x64	0x00	0x00	0x00
-------	------	------	------	------	------	------	------	------

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA1	0x00	0x00	0x00	0x64	0x00	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] and data[5] represent the data size, Data[4] (0x64) is the low bit, and Data[5] (0x00) is the high bit. So the actual data is 0x0064, which means decimal 100, which is $100 \times 0.01 = 1A$ when reduced by 0.01A/LSB. Driving will be performed with 1A as the target current.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA1	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA1	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3], 0x0064, is 100 in decimal, and it is $100 \times 0.01 = 1A$ when scaled down by 100 times, which means that the actual current of the current motor is 1A. The composite data 0x01F4 of Data[4] and Data[5] is 500 in decimal, which means the motor output shaft speed is 500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0x002D is 45 in decimal, which means that the motor output shaft moves 45 degrees in the positive direction relative to the zero position. The position

of the motor output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, if the number of lines of the motor encoder is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA1	0x00	0x00	0x00	0x9C	0xFF	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA1	0x00	0x00	0x00	0x9C	0xFF	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] and data[5] represent the data size, Data[4] (0x9C) is the low bit, Data[5] (0xFF) is the high bit. So the actual data is 0xFF9C, which means decimal -100, which is $-100 \times 0.01 = -1A$ when reduced by 0.01A/LSB. The drive will be performed with -1A as the target current.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA1	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA1	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the

moment. The composite data of Data[2] and Data[3] 0xFF9C is -100 in decimal, and it is $-100 \times 0.01 = -1A$ when scaled down by 100 times, which means that the actual current of the current motor is -1A. The composite data 0xFE0C of Data[4] and Data[5] is -500 in decimal, which means the motor output shaft speed is -500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0xFFD3 is -45 in decimal, which means that the motor output shaft moves in the opposite direction by -45 degrees relative to the zero position. The position of the motor output shaft is related to the number of motor encoder lines and the reduction ratio. For example, if the number of motor encoder lines is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

2.20. Speed Closed-Loop Control Command (0xA2)

2.20.1. Instruction Description

This command is a control command, which can be run when the motor is not faulty. The host sends this command to control the speed of the motor output shaft. The control value speedControl is int32_t type, and the corresponding actual speed is 0.01dps/LSB. The control value maxTorque limits the maximum torque of the motor output shaft. It is uint8_t type, with a value range of 0 to 255. The unit is a percentage of the rated current, specifically 1% of the rated current per LSB (Least Significant Bit). If the given current is 0 or greater than the stall current, the force control mode will not be activated. The maximum torque current of the motor will then be limited by the motor stall current value set in the setup software.

2.20.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA2
DATA[1]	Max torque	DATA[2] = (uint8_t)(maxTorque)
DATA[2]	NULL	0x00

DATA[3]	NULL	0x00
DATA[4]	Speed control low byte	DATA[4] = (uint8_t)(speedControl)
DATA[5]	Speed control	DATA[5] = (uint8_t)(speedControl>>8)
DATA[6]	Speed control	DATA[6] = (uint8_t)(speedControl>>16)
DATA[7]	Speed control high byte	DATA[7] = (uint8_t)(speedControl>>24)

Remark:

1. The maximum torque current of the motor under this command is limited by the Max Torque Current value in the host computer;
2. In this control mode, the maximum acceleration of the motor is limited by the Max Acceleration value in the host computer;
3. When the speed loop acceleration value is 0, the speed loop acceleration is limited by the maximum current output capability.

2.20.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor temperature (int8_t type, 1°C/LSB);
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB);
3. Motor output shaft speed (int16_t type, 1dps/LSB);
4. Motor output shaft angle (int16_t type, 1degree/LSB, maximum range ±32767degree).

Data field	Description	Data
DATA[0]	Command byte	0xA2
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.20.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA2	0x00	0x00	0x00	0x10	0x27	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA2	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to data[7] form one (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x00002710, which means 10000 in decimal. The sending command is reduced by 100 times according to 0.01dps/LSB, that is, $10000 \times 0.01 = 100$ dps. The drive operates at the target speed of 100dps of the motor output shaft.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA2	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA2	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3] 0x0064 is 100 in decimal, and it is $100 \times 0.01 = 1$ A when scaled down by 100 times, which means that the actual current of the current motor is 1A. The composite data 0x01F4 of Data[4] and Data[5] is 500 in decimal, which means the motor output shaft speed is 500dps. There is a reduction ratio 45 /101

relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0x002D is 45 in decimal, which means that the motor output shaft moves 45 degrees in the positive direction relative to the zero position. The position of the motor output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, if the number of lines of the motor encoder is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA2	0x00	0x00	0x00	0xF0	0xD8	0xFF	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA2	0x00	0x00	0x00	0xF0	0xD8	0xFF	0xFF	CRC16L	CRC16H

Description:

Data[4] to data[7] form one (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0xFFFFD8F0, which means -10000 in decimal. The sending command is reduced by 100 times according to 0.01dps/LSB, that is $-10000 \times 0.01 = -100$ dps. The drive runs at the target speed of the motor output shaft -100dps.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA2	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF

RS485:

Frame	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0xA2	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3] 0xFF9C is -100 in decimal, and it is $-100 \times 0.01 = -1A$ when scaled down by 100 times, which means that the actual current of the current motor is -1A. The composite data 0xFE0C of Data[4] and Data[5] is -500 in decimal, which means the motor output shaft speed is -500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7], 0xFFD3, is -45 in decimal, which means that the motor output shaft moves in the opposite direction by -45 degrees relative to the zero position. The position of the motor output shaft is related to the number of motor encoder lines and the reduction ratio. For example, if the number of motor encoder lines is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

2.21. Absolute Position Closed-Loop Control Command (0xA4)

2.21.1. Instruction Description

This command is a control command, which can be run when the motor is not faulty. The host sends this command to control the position of the motor (multi-turn angle). The control value angleControl is int32_t type, and the corresponding actual position is 0.01degree/LSB, that is, 36000 represents 360°, and the rotation direction of the motor is determined by the difference between the target position and the current position. The control value maxSpeed limits the maximum speed of the motor output shaft rotation, which is of type uint16_t, corresponding to the actual speed of 1dps/LSB.

According to the position planning acceleration value set by the system, different operating modes will be different:

1. If the position loop acceleration is 0, then the position loop will enter the direct tracking

mode, and directly track the target position through the PI controller. Among them, maxSpeed limits the maximum speed during the position operation process. If the maxSpeed value is 0, then it is completely output by the calculation result of the PI controller. As shown below.

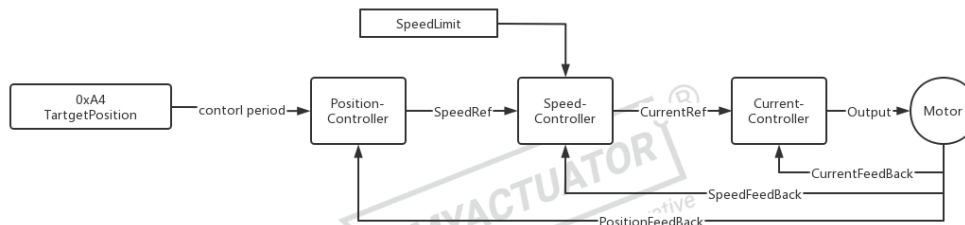


Figure 2-1 Block Diagram of Position Tracking Mode with Speed Limit

2. If the position loop acceleration is not 0, then the motion mode with speed planning will be run, and the motor will complete the acceleration and deceleration process. The maximum operating speed is determined by maxSpeed, and the acceleration is determined by the acceleration set by the position loop.

2.21.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA4
DATA[1]	NULL	0x00
DATA[2]	Speed limit low byte	DATA[2] = (uint8_t)(maxSpeed)
DATA[3]	Speed limit high byte	DATA[3] = (uint8_t)(maxSpeed>>8)
DATA[4]	Position control low byte	DATA[4] = (uint8_t)(angleControl)
DATA[5]	Position control	DATA[5] = (uint8_t)(angleControl>>8)
DATA[6]	Position control	DATA[6] = (uint8_t)(angleControl>>16)
DATA[7]	Position control high byte	DATA[7] = (uint8_t)(angleControl>>24)

2.21.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor temperature (int8_t type, 1°C/LSB).
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB).

3. Motor output shaft speed (int16_t type, 1dps/LSB).

4. Motor output shaft angle (int16_t type, 1degree/LSB, maximum range ± 32767 degree).

Data field	Description	Data
DATA[0]	Command byte	0xA4
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.21.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA4	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA4	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[2] and Data[3] form one (Data[2] is low, Data[3] is high) 16-bit data is 0x01F4, indicating the decimal 500dps motor output shaft speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form a (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x00008CA0, which means 36000 in decimal. The sending command is reduced by 100 times according to 0.01degree/LSB, that is, $36000 \times 0.01 = 360^\circ$. The motor will move forward 360° with the

output shaft relative to the zero position.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA4	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA4	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data 0x0064 of Data[2] and Data[3] is 100 in decimal, which is $100 \times 0.01 = 1\text{A}$ according to the 100-fold reduction, which means that the actual current of the motor is 1A. The synthetic data 0x01F4 of Data[4] and Data[5] is 500 in decimal, which means the motor output shaft speed is 500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, the motor speed is 6 times higher than the output shaft speed. The composite data 0x002D of Data[6] and Data[7] is 45 in decimal, which means that the motor output shaft moves forward by 45 degrees relative to the zero position. The position of the motor output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, the number of lines of the motor encoder is 16384 and the reduction ratio is 6. Then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA4	0x00	0xF4	0x01	0x60	0x73	0xFF	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA4	0x00	0xF4	0x01	0x60	0x73	0xFF	0xFF	CRC16L	CRC16H

Description:

Data[2] and Data[3] form one (Data[2] is low, Data[3] is high) 16-bit data is 0x01F4, indicating the decimal 500dps motor output shaft speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form a (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0xFFFF7360, which means -36000 in decimal. The sending command is reduced by 100 times according to 0.01degree/LSB, that is, $-36000 \times 0.01 = -360^\circ$. The motor will move -360° in reverse with respect to the zero position of the output shaft.

Reply command:

CAN:

ID 号	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA4	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA4	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. Data[2] and Data[3] synthesized data 0xFF9C is -100 in decimal, which is $-100 \times 0.01 = -1A$ when scaled down by 100 times, which means the actual current of the motor is -1A. The synthetic data 0xFE0C of Data[4] and Data[5] is -500 in decimal, which means that the motor output shaft speed is -500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, the motor speed is 6 times higher than the output shaft speed. The synthetic data 0xFFD3 of Data[6] and Data[7] is -45 in decimal, which means that the output shaft of the motor moves backward by -45 degrees relative to the zero position. The position of the motor

51 / 101

output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, the number of lines of the motor encoder is 16384 and the reduction ratio is 6. Then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

2.22. Single-Turn Position Control Command (0xA6)

2.22.1. Instruction Description

The host sends this command to control the position of the motor (single-turn angle). When the multi-lap save function is turned off, the default is single-lap mode. This instruction can be used in single-turn mode.

1. The angle control value angleControl is of uint16_t type, the value range is 0~35999, and the corresponding actual position is 0.01degree/LSB, that is, the actual angle range is $0^{\circ} \sim 359.99^{\circ}$;
2. spinDirection sets the direction of motor rotation, which is uint8_t type, 0x00 means clockwise, and 0x01 means counterclockwise;
3. maxSpeed limits the maximum speed of motor rotation, which is of uint16_t type, corresponding to the actual speed of 1dps/LSB.

2.22.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA6
DATA[1]	Rotation direction byte	DATA[1] = spinDirection
DATA[2]	Speed limit low byte	DATA[2] = (uint8_t)(maxSpeed)
DATA[3]	Speed limit high byte	DATA[3] = (uint8_t)(maxSpeed >> 8)
DATA[4]	Position Control Low byte	DATA[4] = (uint8_t)(angleControl)
DATA[5]	Position Control High byte	DATA[5] = (uint8_t)(angleControl >> 8)
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.22.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains

the following parameters.

1. Motor temperature temperature (int8_t type, 1°C/LSB);
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB);
3. Motor output shaft speed (int16_t type, 1dps/LSB);
4. Encoder position value encoder (uint16_t type, the value range of the encoder is determined by the number of bits of the encoder).

Data Field	Description	Data
DATA[0]	Command byte	0xA6
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Encoder value low byte	DATA[6] = (uint8_t)(encoder)
DATA[7]	Encoder value high byte	DATA[7] = (uint8_t)(encoder>>8)

2.22.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA6	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA6	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 0, which means the motor will rotate clockwise. Data[2] and Data[3] form one (Data[2] is the low bit, Data[3] is the high bit) 16-bit data is 0x01F4, which means the

decimal 500dps motor speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form a (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x8CA0, which means that the decimal system is 36000, and the unit is 0.01 degree. The motor will move 360° clockwise. The 360-degree and 0-degree positions in the single-lap position coincide, so the position may also be 0 degrees at this time.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA6	0x32	0x64	0x00	0xF4	0x01	0xE8	0x03

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA6	0x32	0x64	0x00	0xF4	0x01	0xE8	0x03	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data 0x0064 of Data[2] and Data[3] is 100 in decimal, which is $100 \times 0.01 = 1\text{A}$ according to the 100-fold reduction, which means that the actual current of the motor is 1A. Data[4] and Data[5] synthesized data 0x01F4 is 500 in decimal, which means the motor speed is 500dps. The synthetic data 0x03E8 of Data[6] and Data[7] is 1000 in decimal, which means that the value of the motor encoder relative to the zero position is 1000 pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA6	0x01	0xF4	0x01	0xA0	0x8C	0x00	0x00

RS485:

Frame	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0xA6	0x01	0xF4	0x01	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is 1, which means the motor will rotate counterclockwise. Data[2] and Data[3] form one (Data[2] is the low bit, Data[3] is the high bit) 16-bit data is 0x01F4, which means the decimal 500dps motor speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form a (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x8CA0, which means that the decimal system is 36000, and the unit is 0.01 degree. The motor will move 360° in a counterclockwise direction. The 360-degree and 0-degree positions in the single-lap position coincide, so the position may also be 0 degrees at this time.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA6	0x32	0x64	0x00	0xF4	0x01	0xE8	0x03

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA6	0x32	0x64	0x00	0xF4	0x01	0xE8	0x03	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data 0x0064 of Data[2] and Data[3] is 100 in decimal, which is $100 \times 0.01 = 1A$ according to the 100-fold reduction, which means that the actual current of the motor is 1A. Data[4] and Data[5] synthesized data 0x01F4 is 500 in decimal, which means the motor speed is 500dps. The synthetic data 0x03E8 of Data[6] and Data[7] is 1000 in decimal, which means that the value of the motor encoder relative to the zero position is 1000 pulses.

2.23. Incremental Position Closed-Loop Control Command (0xA8)

2.23.1. Instruction Description

This command is a control command, which can be run when the motor is not faulty. The host sends this command to control the incremental position (multi-turn angle) of the motor, and run the input position increment with the current position as the starting point. The control value angleControl is of type int32_t, and the corresponding actual position is 0.01degree/LSB, that is, 36000 represents 360°, and the rotation direction of the motor is determined by the incremental position symbol.

The control value maxSpeed limits the maximum speed of the motor output shaft rotation, which is of type uint16_t, corresponding to the actual speed of 1dps/LSB.

2.23.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA8
DATA[1]	NULL	0x00
DATA[2]	Speed limit low byte	DATA[2] = (uint8_t)(maxSpeed)
DATA[3]	Speed limit high byte	DATA[3] = (uint8_t)(maxSpeed>>8)
DATA[4]	Position control low byte	DATA[4] = (uint8_t)(angleControl)
DATA[5]	Position control	DATA[5] = (uint8_t)(angleControl>>8)
DATA[6]	Position control	DATA[6] = (uint8_t)(angleControl>>16)
DATA[7]	Position control high byte	DATA[7] = (uint8_t)(angleControl>>24)

2.23.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data contains the following parameters.

1. Motor temperature temperature (int8_t type, 1°C/LSB).
2. The torque current value iq of the motor (int16_t type, 0.01A/LSB).
3. Motor output shaft speed (int16_t type, 1dps/LSB).
4. Motor output shaft angle (int16_t type, 1degree/LSB, maximum range ±32767degree).

Data field	Description	Data
DATA[0]	Command byte	0xA8
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.23.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA8	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA8	0x00	0xF4	0x01	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[2] and Data[3] form one (Data[2] is the low bit, Data[3] is the high bit) 16-bit data is 0x01F4, which means the decimal 500dps motor output shaft speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form one (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0x00008CA0, which means 36000 in decimal. The sending command is reduced by 100 times according to 0.01degree/LSB, that is, $36000 \times 0.01 = 360^\circ$. The motor will move 360° in the positive direction with the output shaft relative to the current position.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA8	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA8	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3] 0x0064 is 100 in decimal, and it is $100 \times 0.01 = 1\text{A}$ when scaled down by 100 times, which means that the actual current of the current motor is 1A. The composite data 0x01F4 of Data[4] and Data[5] is 500 in decimal, which means the motor output shaft speed is 500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0x002D is 45 in decimal, which means that the motor output shaft moves 45 degrees in the positive direction relative to the zero position. The position of the motor output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, if the number of lines of the motor encoder is 16384 and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA8	0x00	0xF4	0x01	0x60	0x73	0xFF	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H

0x3E	0x01	0x08	0xA8	0x00	0xF4	0x01	0x60	0x73	0xFF	0xFF	CRC16L	CRC16H
------	------	------	------	------	------	------	------	------	------	------	--------	--------

Description:

Data[2] and Data[3] form one (Data[2] is the low bit, Data[3] is the high bit) 16-bit data is 0x01F4, which means the decimal 500dps motor output shaft speed. The drive will run the position loop at this speed as the maximum speed. Data[4] to data[7] form one (Data[4] is the lowest bit, Data[7] is the highest bit) 32-bit data is 0xFFFF7360, which means -36000 in decimal. The sending command is reduced by 100 times according to 0.01degree/LSB, ie $-36000 \times 0.01 = -360^\circ$. The motor will move -360° in the opposite direction relative to the current position with the output shaft.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA8	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA8	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, which means the motor temperature is 50 degrees at the moment. The composite data of Data[2] and Data[3] 0xFF9C is -100 in decimal, and it is $-100 \times 0.01 = -1A$ when scaled down by 100 times, which means that the actual current of the current motor is -1A. The composite data 0xFE0C of Data[4] and Data[5] is -500 in decimal, which means the motor output shaft speed is -500dps. There is a reduction ratio relationship between the motor output shaft speed and the motor speed. If the reduction ratio is 6, then the motor speed is 6 times higher than the output shaft speed. The composite data of Data[6] and Data[7] 0xFFD3 is -45 in decimal, which means that the motor output shaft moves in the opposite direction by -45 degrees relative to the zero position. The position of the motor output shaft is related to the number of lines of the motor encoder and the reduction ratio. For example, if the number of lines of the motor encoder is 16384

59 /101

and the reduction ratio is 6, then 360 degrees of the motor output shaft corresponds to $16384 \times 6 = 98304$ pulses.

2.24. Force Control Position Closed-Loop Command (0xA9)

2.24.1. Instruction Description

This command is a control command that can be executed when there are no faults in the motor. The host computer sends this command to control the position (multi-turn angle) of the motor. The control value `angleControl` is of type `int32_t`, corresponding to an actual position of 0.01 degree/LSB. For example, 36000 represents 360°. The direction of motor rotation is determined by the difference between the target position and the current position.

The control value `maxSpeed` limits the maximum rotational speed of the motor output shaft. It is of type `uint16_t`, corresponding to an actual speed of 1 dps/LSB (degrees per second).

The control value `maxTorque` limits the maximum torque of the motor output shaft. It is of type `uint8_t`, with a value range of 0 to 255, representing the percentage of the rated current, specifically 1% of the rated current per LSB. If the given current exceeds the stall current, the force control mode will not be activated. The maximum torque current of the motor will then be limited by the motor stall current value set in the setup software.

2.24.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xA9
DATA[1]	Max Torque	DATA[2] = (uint8_t)(maxTorque)
DATA[2]	Speed Limit Low Byte	DATA[2] = (uint8_t)(maxSpeed)
DATA[3]	Speed Limit High Byte	DATA[3] = (uint8_t)(maxSpeed>>8)
DATA[4]	Position Control Low Byte	DATA[4] = (uint8_t)(angleControl)
DATA[5]	Position Control	DATA[5] = (uint8_t)(angleControl>>8)
DATA[6]	Position Control	DATA[6] = (uint8_t)(angleControl>>16)
DATA[7]	Position Control High Byte	DATA[7] = (uint8_t)(angleControl>>24)

2.24.3. Reply Data Field Definition

After receiving the command, the motor replies to the host. The data frame includes the following parameters:

1. Motor temperature “temperature” (type int8_t, 1°C/LSB);
2. Motor torque current value “iq” (type int16_t, 0.01A/LSB);
3. Motor output shaft speed “speed” (type int16_t, 1dps/LSB);
4. Motor output shaft angle (type int16_t, 1degree/LSB, maximum range ± 32767 degrees).

Data field	Description	Data
DATA[0]	Command byte	0xA9
DATA[1]	Motor temperature	DATA[1] = (uint8_t)(temperature)
DATA[2]	Torque current low byte	DATA[2] = (uint8_t)(iq)
DATA[3]	Torque current high byte	DATA[3] = (uint8_t)(iq>>8)
DATA[4]	Motor speed low byte	DATA[4] = (uint8_t)(speed)
DATA[5]	Motor speed high byte	DATA[5] = (uint8_t)(speed>>8)
DATA[6]	Motor angle low byte	DATA[6] = (uint8_t)(degree)
DATA[7]	Motor angle high byte	DATA[7] = (uint8_t)(degree>>8)

2.24.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA9	0x3C	0xF4	0x01	0xA0	0x8C	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA9	0x3C	0xF4	0x01	0xA0	0x8C	0x00	0x00	CRC16L	CRC16H

Description:

Data[1] is an 8-bit data value of 0x3C, which represents $60 \times 1\% \times \text{rated current}$ in decimal.

Data[2] and Data[3] form a 16-bit data value (Data[2] as the low byte and Data[3] as the high byte) of 0x01F4, which represents 500 dps (degrees per second) in decimal for the motor output shaft speed. The drive will operate with a maximum torque of 60% rated torque and a maximum speed of 500 dps in the position loop. Data[4] to Data[7] form a 32-bit data value (Data[4] as the lowest byte and Data[7] as the highest byte) of 0x00008CA0, which represents 36000 in decimal. The command is scaled down by a factor of 100 according to 0.01 degree/LSB, i.e., $36000 \times 0.01 = 360^\circ$. The motor will move the output shaft positively by 360° relative to the zero position.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA9	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA9	0x32	0x64	0x00	0xF4	0x01	0x2D	0x00	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, indicating that the current motor temperature is 50°C . Data[2] and Data[3] form the data 0x0064, which is 100 in decimal. According to the scaling factor of 100 times, this translates to $100 \times 0.01 = 1\text{A}$. Therefore, it represents that the actual current of the motor at this moment is 1A. Data[4] and Data[5] form the data 0x01F4, which is 500 in decimal, representing the motor output shaft speed as 500 dp (degrees per second). There is a gear ratio relationship between the motor output shaft speed and the motor speed. If the gear ratio is 6, then the motor speed is 6 times higher than the output shaft speed. Data[6] and Data[7] form the data 0x002D, which is 45 in decimal, indicating that the motor output shaft has moved positively by 45 degrees relative to the zero position. The position of the motor output shaft is related to the motor encoder lines and the gear ratio. For example, if the motor encoder has 16384 lines and the gear ratio is 6, then the 360 degrees of the motor output shaft corresponds to 16384×6

62 /101

= 98304 pulses.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xA9	0x3C	0xF4	0x01	0x60	0x73	0xFF	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA9	0x3C	0xF4	0x01	0x60	0x73	0xFF	0xFF	CRC16L	CRC16H

Description:

Data[1] is an 8-bit data value of 0x3C, which represents 60*1%*rated current in decimal. Data[2] and Data[3] form a 16-bit data value (Data[2] as the low byte and Data[3] as the high byte) of 0x01F4, which represents 500 dps (degrees per second) in decimal for the motor output shaft speed. The drive will operate with a maximum torque of 60%*rated torque and a maximum speed of 500 dps in the position loop. Data[4] to Data[7] form a 32-bit data value (Data[4] as the lowest byte and Data[7] as the highest byte) of 0xFFFF7360, which represents -36000 in decimal. The command is scaled down by a factor of 100 according to 0.01 degree/LSB, i.e., $-36000 \times 0.01 = -360^\circ$. The motor will move the output shaft negatively by -360° relative to the zero position.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xA9	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xA9	0x32	0x9C	0xFF	0x0C	0xFE	0xD3	0xFF	CRC16L	CRC16H

Description:

Data[1] = 0x32 is 50 in decimal, indicating that the motor temperature at this moment is 50 degrees. Data[2] and Data[3] form the data 0xFF9C, which is -100 in decimal. After scaling down by a factor of 100, it becomes $-100 \times 0.01 = -1A$, representing that the actual current of the motor at present is -1A. Data[4] and Data[5] form the data 0xFE0C, which is -500 in decimal, indicating that the motor output shaft speed is -500 dps (degrees per second). There is a gear ratio relationship between the motor output shaft speed and the motor speed. If the gear ratio is 6, then the motor speed is 6 times higher than the output shaft speed. Data[6] and Data[7] form the data 0xFFD3, which is -45 in decimal, indicating that the motor output shaft has moved -45 degrees in the reverse direction relative to the zero position. The position of the motor output shaft is related to the motor encoder lines and the gear ratio. For example, if the motor encoder lines are 16384 and the gear ratio is 6, then 360 degrees of the motor output shaft correspond to $16384 \times 6 = 98304$ pulses.

2.25. System Operating Mode Acquisition (0x70)

2.25.1. Instruction Description

This command reads the current motor running mode.

2.25.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x70
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.25.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the drive reply data

contains the running state of the parameter runmode, which is of type uint8_t.

The motor operation mode has the following 3 states:

1. Current loop mode (0x01);
2. Speed loop mode (0x02);
3. Position loop mode (0x03).

Data field	Description	Data
DATA[0]	Command byte	0x70
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	Motor operating mode	DATA[7] = (uint8_t)(runmode)

2.25.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x70	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x70	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

This command reads the current motor running mode.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x70	0x00	0x00	0x00	0x00	0x00	0x00	0x03

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x70	0x00	0x00	0x00	0x00	0x00	0x00	0x03	CRC16L	CRC16H

Description:

Data[7] = 0x03, according to the definition of the reply frame, it means that the current system is in the position loop mode.

2.26. System Reset Command (0x76)

2.26.1. Instruction Description

This command is used to reset the system program.

2.26.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x76
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.26.3. Reply Data Field Definition

The motor will reset after receiving the command and will not return to the command.

2.26.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x76	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x76	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

After sending the command, the system is reset and the program runs again.

2.27. System Brake Release Command (0x77)

2.27.1. Instruction Description

This command is used to open the system brake. The system will release the holding brake, and the motor will be in a movable state without being restricted by the holding brake.

2.27.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x77
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.27.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as the command sent by the host.

2.28. System Brake Lock Command (0x78)

2.28.1. Instruction Description

This command is used to close the system holding brake. The holding brake locks the motor and the motor can no longer run. The holding brake is also in this state after the system is powered off.

2.28.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x78
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.28.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as the command sent by the host.

2.29. System Runtime Read Command (0xB1)

2.29.1. Instruction Description

This command is used to obtain the system running time in ms.

2.29.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB1
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00

DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.29.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the drive reply data contains the system running time SysRunTime, which is uint32_t type, and the unit is ms.

Data field	Description	Data
DATA[0]	Command byte	0xB1
DATA[0]	NULL	0x00
DATA[0]	NULL	0x00
DATA[0]	NULL	0x00
DATA[4]	SysRunTime low byte 1	DATA[4] = (uint8_t)(SysRunTime)
DATA[5]	SysRunTime byte 2	DATA[5] = (uint8_t)(SysRunTime>>8)
DATA[6]	SysRunTime byte 3	DATA[6] = (uint8_t)(SysRunTime>>16)
DATA[7]	SysRunTime byte 4	DATA[7] = (uint8_t)(SysRunTime>>24)

2.29.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB1	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB1	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

This command reads the running time of the current system.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xB1	0x00	0x00	0x00	0x00	0x00	0x00	0x10

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB1	0x00	0x00	0x00	0x00	0x00	0x00	0x10	CRC16L	CRC16H

Description:

Data[4] to Data[7] (Data[4] is low and Data[7] is high) = 0x10000000, decimal 268435456, indicating that the system has run for 268435456ms after restarting or resetting, about 74 hour.

2.30. System Software Version Date Read Command (0xB2)

2.30.1. Instruction Description

This command is used to get the update date of the system software version.

2.30.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB2
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.30.3. Reply Data Field Definition

The motor will reply to the host after receiving the command. The driver reply data contains the latest version date of the system software, VersionDate, which is of type uint32_t. The date format is in the format of year, month, and day, such as 20211126.

Data field	Description	Data
DATA[0]	Command byte	0xB2
DATA[0]	NULL	0x00
DATA[0]	NULL	0x00
DATA[0]	NULL	0x00
DATA[4]	VersionDate low byte 1	DATA[4] = (uint8_t)(VersionDate)
DATA[5]	VersionDate byte 2	DATA[5] = (uint8_t)(VersionDate>>8)
DATA[6]	VersionDate byte 3	DATA[6] = (uint8_t)(VersionDate>>16)
DATA[7]	VersionDate byte 4	DATA[7] = (uint8_t)(VersionDate>>24)

2.30.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB2	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB2	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

This command reads the current software version date.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xB2	0x00	0x00	0x00	0x2E	0x89	0x34	0x01

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
--------------	----	--------	----	----	----	----	----	----	----	----	--------	--------

0x3E	0x01	0x08	0xB2	0x00	0x00	0x00	0x2E	0x89	0x34	0x01	CRC16L	CRC16H
------	------	------	------	------	------	------	------	------	------	------	--------	--------

Description:

Data[4] to Data[7] (Data[4] is low and Data[7] is high) = 0x0134892E, decimal 20220206, indicating that the software version date is February 6, 2022.

2.31. Communication Interruption Protection Time Setting

Command (0xB3)

2.31.1. Instruction Description

This command is used to set the communication interruption protection time in ms. If the communication is interrupted for more than the set time, it will cut off the output brake lock. To run again, you need to establish stable and continuous communication first. Writing 0 means that the communication interruption protection function is not enabled.

2.31.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB3
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	CanRecvTime_MS low byte1	DATA[4] = (uint8_t)(CanRecvTime_MS)
DATA[5]	CanRecvTime_MS byte2	DATA[5] = (uint8_t)(CanRecvTime_MS >> 8)
DATA[6]	CanRecvTime_MS byte3	DATA[6] = (uint8_t)(CanRecvTime_MS >> 16)
DATA[7]	CanRecvTime_MS byte4	DATA[7] = (uint8_t)(CanRecvTime_MS >> 24)

2.31.3. Reply Data Field Definition

The motor replies to the host after receiving the command, and the frame data is the same as the command sent by the host.

2.31.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Note: The data values are all 0, which means that the communication interruption protection function is not enabled. If the communication is interrupted, the motor will continue to execute the current command.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

The frame data is the same as the command sent by the host.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB3	0x00	0x00	0x00	0xE8	0x03	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB3	0x00	0x00	0x00	0xE8	0x03	0x00	0x00	CRC16L	CRC16H

Description:

Data[4] to Data[7] (Data[4] is low and Data[7] is high) constitute data 0x000003E8, decimal is 1000ms. It indicates that the communication interruption protection time is set to 1000ms, which is stored in the ROM and saved after power failure. Then, if the communication interval exceeds 1000ms, the communication interruption protection will be triggered, and the output lock brake will be cut off. When the communication interval is restored to within 1000ms, normal operation can be resumed.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB3	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The frame data is the same as the command sent by the host.

2.32. Communication Baud Rate Setting Command (0xB4)

2.32.1. Instruction Description

This instruction can set the communication baud rate of CAN and RS485 bus. The parameters will be saved in ROM after setting, and will be saved after power off, and will run at the modified baud rate when powered on again.

Baud rate:

RS485: 0 stands for 115200bps baud rate,

1 stands for 500Kbps baud rate,

2 stands for 1Mbps baud rate,

3 stands for 1.5Mbps baud rate,

4 stands for 2.5Mbps baud rate;

CAN: 0 stands for 500Kbps baud rate,

1 stands for 1Mbps baud rate.

2.32.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB4
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	Baud rate	DATA[7] = (uint8_t)baudrate

2.32.3. Reply Data Field Definition

Since the communication baud rate is modified, the reply command is random and need not be processed.

2.32.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: Data[7] = 0, which means the baud rate of RS485 is changed to 115200bps, and the baud rate of CAN is changed to 500Kbps.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x01

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x01	CRC16L	CRC16H

Description: Data[7] = 1, which means the RS485 baud rate is changed to 500Kbps, and the CAN baud rate is changed to 1Mbps.

Example 3:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x02

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB4	0x00	0x00	0x00	0x00	0x00	0x00	0x02	CRC16L	CRC16H

Description: Data[7] = 2, which means the RS485 baud rate is changed to 1Mbps, and CAN is invalid.

2.33. Motor Model Reading Command (0xB5)

2.33.1. Instruction Description

This command is used to read the motor model, and the read data is ACSII code, which can be converted into the corresponding actual symbol by checking the ACSII code table.

2.33.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB5
DATA[1]	NULL	0x00
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	NULL	0x00

2.33.3. Reply Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB5
DATA[1]	Motor model 1	Type1(ACSII)
DATA[2]	Motor model 2	Type2(ACSII)
DATA[3]	Motor model 3	Type3(ACSII)
DATA[4]	Motor model 4	Type4(ACSII)
DATA[5]	Motor model 5	Type5(ACSII)
DATA[6]	Motor model 6	Type6(ACSII)
DATA[7]	Motor model 7	Type7(ACSII)

2.33.4. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB5	0x00	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame	ID	length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0xB5	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: Send the command to read the motor model.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0xB5	0x58	0x38	0x53	0x32	0x56	0x31	0x30

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0xB5	0x58	0x38	0x53	0x32	0x56	0x31	0x30	CRC16L	CRC16H

Description: This command replies with 7 ACSII codes, and the 7 characters corresponding to the motor model are obtained by looking up the table: RMD-X8 S2 V10.

2.34. Active Reply Function Command (0xB6)

2.34.1. Instruction Description

This command is used to select the specified command to actively reply at a fixed time, and more than 1 command can be specified, and different commands will be cyclically and alternately replied according to the set time. If an active reply command is set, the motor will not reply after receiving the command. Only valid for CAN version, 485 version does not support this function.

2.34.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0xB6
DATA[1]	Specify the command for proactive response	Reply commands include: 0x60、0x61、0x62、0x92、0x9A、0x9C、0x9D、0x9E;
DATA[2]	Unsolicited reply enable bit	0: Turn off the active reply function of this command; 1: Enable the active reply function of this

		command:
DATA[3]	The lower 8 bits of the reply interval parameter	Reply interval time,unit 10ms. Alternate loop reply when replying multiple commands.
DATA[4]	The high 8 bits of the reply interval parameter	
DATA[5]	NULL	NULL
DATA[6]	NULL	NULL
DATA[7]	NULL	NULL

2.34.3. Reply Data Field Definition

After enabling it,the data will not be returned,and the motor will actively reply to the selected command content according to the set time interval.

2.34.4. Example of Communication

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0xB6	0x60	0x01	0x01	0x00	0x00	0x00	0x00

Description: Enable 0x60 active reply command,the time interval is 20ms. After sending this command,the motor will not reply when receiving the command,but will reply 0x60 command at intervals of 10ms.

2.35. Function Control Command (0x20)

2.35.1. Instruction Description

This instruction is used to use some specific functions. It is a compound function instruction,which can contain multiple function control instructions.Be careful to avoid writing parameters when the motor has just started and is in motion.

2.35.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x20

DATA[1]	Function index	DATA[1] = (uint8_t)index
DATA[2]	NULL	0x00
DATA[3]	NULL	0x00
DATA[4]	Input parameter low byte 1	DATA[4] = (uint8_t)(Value)
DATA[5]	Input parameter byte 2	DATA[5] = (uint8_t)(Value>>8)
DATA[6]	Input parameter byte 3	DATA[6] = (uint8_t)(Value>>16)
DATA[7]	Input parameter byte 4	DATA[7] = (uint8_t)(Value>>24)

2.35.3. Reply Data Field Definition

The motor replies to the host computer after receiving the command, and the frame data is the same as the command sent by the host computer.

2.35.4. Function Index Description

Index value	Command name	Function description
0x01	Clear multi-turn value	Clear motor multi-turn value, update zero point and save. It will take effect after restarting.
0x02	CANID filter enable	<p>The value “1” means that the CANID filter is enabled, which can improve the efficiency of motor sending and receiving in CAN communication;</p> <p>The value “0” means the disabled CANID filter, which needs to be disabled when the multi-motor control command 0x280, 0x300 is required;</p> <p>This value will be saved in FLASH, and the written value will be recorded after power off.</p>
0x03	Error status transmission enable	The value “1” means that this function is enabled. After the motor appears in an error state, it actively sends the status command 0x9A to the bus with a sending cycle of 100ms. Stop

		<p>sending after the error status disappears;</p> <p>The value “0” means the function is disabled.</p>
0x04	<p>The multi-turn value is saved when the power is off.</p>	<p>The value “1” means that this function is enabled, and the motor will save the current multi-turn value before powering off;</p> <p>The value “0” means that this function is disabled; at this time, the system defaults to single lap mode; it will take effect after restarting.</p>
0x05	<p>Set CANID</p>	<p>The value means the CANID number that is going to be modified, which will be saved to ROM and take effect after a reboot.</p>
0x06	<p>Set the maximum positive angle for the position operation mode</p>	<p>The value represents the maximum positive angle value for the position operation mode, which is set and saved to ROM to take effect immediately.</p>
0x07	<p>Set the maximum negative angle for the position operation mode</p>	<p>The value represents the maximum negative angle value for the position operation mode, which is set and saved to ROM to take effect immediately.</p>

2.35.5. Communication Example

Example 1:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x20	0x01	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x20	0x01	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: Data[1] = 0x01, according to the index value table, the representative function is to clear the multi-turn value.

Reply command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x20	0x01	0x00	0x00	0x00	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x20	0x01	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The frame data is the same as the command sent by the host.

Example 2:

Send command:

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x141	0x20	0x02	0x00	0x00	0x01	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x20	0x02	0x00	0x00	0x01	0x00	0x00	0x00	CRC16L	CRC16H

Description: Data[1] = 0x01, according to the index value table, the representative function is to enable the CANID filter. Note that the 0x280 multi-motor command cannot be used after enabling, and the CANID filter needs to be disabled before using the 0x280 command again.

Reply command :

CAN:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x20	0x02	0x00	0x00	0x01	0x00	0x00	0x00

RS485:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x01	0x08	0x20	0x02	0x00	0x00	0x01	0x00	0x00	0x00	CRC16L	CRC16H

Description: The frame data is the same as the command sent by the host computer.

3. CAN Multi-Motor Command (0x280 + Command)

3.1. Instruction Description

The ID number is 280, which means that multiple motors correspond to the same command at the same time. The content and function of the instruction are the same as those of the single-motor instruction.

3.2. Communication Example

Suppose there are 4 motors on the CAN bus, and the ID numbers are 141, 142, 143, and 144 respectively.

Example 1:

Send command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x280	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

4 motors receive the 0x80 motor shutdown command at the same time (see 2.30 for details), and then all 4 motors immediately execute the motor shutdown command.

Reply command:

4 motors reply at the same time, and the reply ID is their own ID number respectively. The reply sequence depends on the respective delays on the bus.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x241	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

The motor whose ID number is 0x241 returns the corresponding command.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x242	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

The motor whose ID number is 0x242 returns the corresponding command.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x243	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

The motor whose ID number is 0x243 returns the corresponding command.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x244	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

The motor whose ID number is 0x244 returns the corresponding command.

Example 2:

Send command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x280	0x60	0x00	0x00	0x00	0x00	0x00	0x00	0x00

Description:

4 motors receive the 0x60 read multi-turn encoder position data command at the same time (see 2.21 for details), and then the 4 motors reply to their respective multi-turn encoder position data.

Reply command:

4 motors reply at the same time, and the reply ID is their own ID number respectively. The reply sequence depends on the respective delays on the bus.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
----	---------	---------	---------	---------	---------	---------	---------	---------

0x241	0x60	0x00	0x00	0x00	0x10	0x27	0x00	0x00
-------	------	------	------	------	------	------	------	------

Description:

The motor reply data with ID number 0x241 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00002710, which means the decimal is 10000. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 10000 pulses.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x242	0x60	0x00	0x00	0x00	0x20	0x4E	0x00	0x00

Description:

The motor reply data with ID number 0x242 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00004E20, which means 20000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 20000 pulses.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x243	0x60	0x00	0x00	0x00	0x30	0x75	0x00	0x00

Description:

The motor reply data with ID number 0x243 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00007530, which means 30000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 30000 pulses.

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x244	0x60	0x00	0x00	0x00	0x40	0x9C	0x00	0x00

Description:

The motor reply data with ID number 0x243 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00007530, which means 30000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 30000 pulses.

4. CANID Setting Command (0x79)

4.1. Instruction Description

This command is used to set and read CANID. The host sends this command to set and read the CAN ID, the parameters are as follows.

1. The read and write flag bit wReadWriteFlag is bool type, 1 read 0 write;
2. CANID, size range (#1~#32), uint16_t type (synchronized with the upper computer function), device identifier 0x140 + ID (1~32).

4.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x79
DATA[1]	NULL	0x00
DATA[2]	Read and write flags	DATA[2] = wReadWriteFlag
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	CANID	DATA[7] = CANID(1~32)

4.3. Reply Data Field Definition

The motor replies to the host after receiving the command, which is divided into the following two situations:

1. Set CANID, the range is 1-32, and return to the original command.
2. Read CANID, the return parameters are as follows.

Data field	Description	Data
DATA[0]	Command byte	0x79
DATA[0]	NULL	0x00
DATA[0]	Read and write flags	DATA[2] = wReadWriteFlag

DATA[0]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	CANID low byte 1	DATA[6] = (uint8_t*)(CANID)
DATA[7]	CANID byte 2	DATA[7] = (uint8_t)(CANID>>8)

4.4. Communication Example

Example 1:

Send command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x300	0x79	0x00	0x00	0x00	0x00	0x00	0x00	0x02

Description:

Data[2] = 0 means write CANID. Data[7] = 1 means that the motor CANID is set to 2, that is, the send ID is 0x142, and the reply ID is 0x242.

Reply command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x300	0x79	0x00	0x00	0x00	0x00	0x00	0x00	0x02

Description:

Same as sending command.

Example 2:

Send command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x300	0x79	0x00	0x01	0x00	0x00	0x00	0x00	0x00

Description:

Data[2] = 1 means reading CANID.

Reply command:

ID	Data[0]	Data[1]	Data[2]	Data[3]	Data[4]	Data[5]	Data[6]	Data[7]
0x300	0x79	0x00	0x01	0x00	0x00	0x00	0x42	0x02

Description:

Data[6] and Data[7] form 0x242, which means that the motor send ID is 0x142, and the reply ID is 0x242.

5. Motion Mode Control Command_CAN (0x400 + ID)

5.1. Instruction Description

The command consists of 5 input parameters: p_des (desired position), v_des (desired velocity), t_ff (feedforward torque), kp (position deviation coefficient), kd (speed deviation coefficient).

Each parameter has a preset range size:

p_des: -12.5 to 12.5 in rad, the data type is uint16_t, with a value range of 0 to 65535. Here, 0 represents -12.5, and 65535 represents 12.5. All values between 0 and 65535 are mapped proportionally to the range of -12.5 to 12.5.

v_des: -45 to 45, in rad/s, the data type is a 12-bit unsigned integer, with a value range of 0 to 4095. Here, 0 represents -45, and 4095 represents 45. All values between 0 and 4095 are mapped proportionally to the range of -45 to 45.

kp: 0 to 500, the data type is a 12-bit unsigned integer, with a value range of 0 to 4095. Here, 0 represents 0, and 4095 represents 500. All values between 0 and 4095 are mapped proportionally to the range of 0 to 500.

kd: 0 to 5, the data type is a 12-bit unsigned integer, with a value range of 0 to 4095. Here, 0 represents 0, and 4095 represents 5. All values between 0 and 4095 are mapped proportionally to the range of 0 to 5.

t_ff: -24 to 24, unit N-m, the data type is a 12-bit unsigned integer, with a value range of 0 to 4095. Here, 0 represents -24, and 4095 represents 24. All values between 0 and 4095 are mapped proportionally to the range of -24 to 24.

Function expression:

$$I_{qRef} = [kp \cdot (p_{des} - p_{fb_actual} \text{ position}) + kd \cdot (v_{des} - v_{fb_actual} \text{ speed}) + t_{ff}] \cdot K_T \text{ torque coefficient};$$

I_{qRef} is the output current of the last given motor.

5.2. Send Data Field Definition (Big-endian byte order)

Data field	Data partition	Data combination	Data definition	Data range
DATA[0]	4-7bit	p_des[8-15]	p_des Upper 8-bit data	16-bit range
	0-3bit			
DATA[1]	4-7bit	p_des[0-7]	p_des Lower 8-bit data	
	0-3bit			
DATA[2]	4-7bit	v_des[4-11]	v_des Upper 8-bit data	12-bit range
	0-3bit			
DATA[3]	4-7bit	v_des[0-3]	v_des Lower 8-bit data	
	0-3bit	kp[8-11]	kp Upper 4-bit data	
DATA[4]	4-7bit	kp[0-7]	kp Lower 8-bit data	
	0-3bit			
DATA[5]	4-7bit	kd[4-11]	kd Upper 8-bit data	12-bit range
	0-3bit			
DATA[6]	4-7bit	kd[0-3]	kd Lower 4-bit data	
	0-3bit	t_ff[8-11]	t_ff Upper 4-bit data	
DATA[7]	4-7bit	t_ff[0-7]	t_ff Lower 8-bit data	
	0-3bit			

5.3. Reply Data Field Definition (Big-endian byte order)

Data field	Data partition	Data combination	Data definition	Data range
DATA[0]	7-0bit	CANID[0-7]	Device CAN address number	8-bit range
DATA[1]	4-7bit	p_des[8-15]	p_des Upper 8-bit data	16-bit range
	0-3bit			
DATA[2]	4-7bit	p_des[0-7]	p_des Lower 8-bit data	
	0-3bit			

DATA[3]	4-7bit	v_des[4-11]	v_des Upper 8-bit data	12-bit range
	0-3bit			
DATA[4]	4-7bit	v_des[0-3]	v_des Lower 4-bit data	12-bit range
	0-3bit	t_ff[8-11]	t_ff Upper 4-bit data	
DATA[5]	4-7bit	t_ff[0-7]	t_ff Lower 8-bit data	12-bit range
	0-3bit			
DATA[6]	4-7bit	NULL	NULL	NULL
	0-3bit			
DATA[7]	4-7bit	NULL	NULL	NULL
	0-3bit	NULL	NULL	

5.4. Communication Example

Example 1:

Send command: ID number 0x401

Data field	Data	Data partition		Data definition	Data range	Data calculation instructions
DATA[0]	0xE6	4-7bit	0xE	p_des	(-)12.5rad~12.5rad total	p_des=(58982/65535)*25+(-12.5)=9.99rad
		0-3bit	0x6	value is 0xE666 decimal is (58982)		
DATA[1]	0x66	4-7bit	0x6	0xE666 decimal is (58982)	5rad total	p_des=(58982/65535)*25+(-12.5)=9.99rad
		0-3bit	0x6			
DATA[2]	0x82	4-7bit	0x8	v_des	(-)45rad/s~45rad/s total	v_des=(2094/4095)*90+(-45)=1.021rad/s
		0-3bit	0x2	value is 0x82E decimal is (2094)		
DATA[3]	0xE0	4-7bit	0xE	0x82E decimal is (2094)	5rad/s total 90rad/s	v_des=(2094/4095)*90+(-45)=1.021rad/s
		0-3bit	0x0			
DATA[4]	0x52	4-7bit	0x5	kp value is 0x52	0~500 total 500	kp=(82/4095)*500+0=10.012
		0-3bit	0x2			

				decimal is (82)		
DATA[5]	0x33	4-7bit	0x3	kd value	0~5 total 5	kd=(819/4095)*5+0 =1
		0-3bit	0x3	is 0x333		
DATA[6]	0x3 B	4-7bit	0x3	decimal is (819)		
		0-3bit	0xB	t_ff value	(-)24N- m~24N-m total 48N-m	t_ff=(2901/4095)*4 8+(-24)=10.004 N- m
DATA[7]	0x55	4-7bit	0x5	is 0xB55		
		0-3bit	0x5	decimal is (2901)		

Reply command: ID No. 0x501

Data field	Data	Data partition		Data definition	Data range	Data calculation instructions
DATA[0]	0x01	7-0bit	0x1	CANID	0-32	Device address ID number
DATA[1]	0xE 6	4-7bit	0xE	p_des value	(-)12.5rad~12.5rad total 25rad	p_des=(58982/65535)*25 + (-12.5)= 9.99 rad
		0-3bit	0x6	is 0xE666		
DATA[2]	0x65	4-7bit	0x6	decimal is	(-)45rad/s~45rad/s total 90rad/s	v_des=(2094/4095)*90+(-45)=1.021rad/s
		0-3bit	0x6	(58982)		
DATA[3]	0x82	4-7bit	0x8	v_des value	(-)24N-m~24N-m total 48N-m	t_ff=(2901/4095)*4 8 + (-24)= 10.004 N- m
		0-3bit	0x2	is 0x82E		
DATA[4]	0xE B	4-7bit	0xE	decimal is (2094)		
		0-3bit	0xB	t_ff value is		
DATA[5]	0x55	4-7bit	0x5	0xB55		
		0-3bit	0x5	decimal is (2901)		
DATA[6]		4-7bit	NULL	NULL	NULL	NULL

		0-3bit	NU LL	NULL	NULL	NULL
DATA[7]		4-7bit	NU LL	NULL	NULL	NULL
		0-3bit	NU LL	NULL	NULL	NULL

6. RS485 Multi-Motor Command (0xCD + Command)

6.1. Instruction Description

The ID number is 0xCD, which means that multiple motors correspond to the same command at the same time. The content and function of the instruction are the same as those of the single-motor instruction. For details, please refer to the single-motor instruction.

6.2. Communication Example

Suppose there are 4 motors on the RS485 bus, and the ID numbers are 01, 02, 03, 04 respectively.

Example 1:

Send command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0xCD	0x08	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

4 motors receive the 0x80 motor shutdown command at the same time (see 2.30 for details), and then all 4 motors immediately execute the motor shutdown command.

Reply command:

4 motors reply at the same time, and the reply ID is their own ID number respectively. The reply sequence depends on the respective delays on the bus.

Frame	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The motor whose ID number is 0x01 returns the corresponding command.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x02	0x08	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The motor whose ID number is 0x02 returns the corresponding command.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x03	0x08	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The motor whose ID number is 0x03 returns the corresponding command.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x04	0x08	0x80	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description: The motor whose ID number is 0x04 returns the corresponding command.

Example 2:

Send command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0xCD	0x08	0x60	0x00	0x00	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H

Description:

4 motors receive the 0x60 read multi-turn encoder position data command at the same time (see 2.21 for details), and then the 4 motors reply to their respective multi-turn encoder position data.

Reply command:

4 motors reply at the same time, and the reply ID is their own ID number respectively. The reply sequence depends on the respective delays on the bus.

Frame	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
-------	----	--------	----	----	----	----	----	----	----	----	--------	--------

header												
0x3E	0x01	0x08	0x60	0x00	0x00	0x00	0x10	0x27	0x00	0x00	CRC16L	CRC16H

Description:

The motor reply data with ID number 0x01 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00002710, which means the decimal is 10000. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 10000 pulses.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x02	0x08	0x60	0x00	0x00	0x00	0x20	0x4E	0x00	0x00	CRC16L	CRC16H

Description:

The motor reply data with ID number 0x02 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00004E20, which means 20000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 20000 pulses.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x03	0x08	0x60	0x00	0x00	0x00	0x30	0x75	0x00	0x00	CRC16L	CRC16H

Description:

The motor reply data with ID number 0x03 consists of Data[4] to data[7] (Data[4] is the lowest bit, Data[7] is the highest bit). The 32-bit data is 0x00007530, which means 30000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 30000 pulses.

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0x04	0x08	0x60	0x00	0x00	0x00	0x40	0x9C	0x00	0x00	CRC16L	CRC16H

Description:

The motor reply data with ID number 0x04 consists of Data[4] to data[7] (Data[4] is the

lowest bit,Data[7] is the highest bit). The 32-bit data is 0x00009C40,which means 40000 in decimal. The multi-turn encoder value representing the current relative multi-turn zero offset (initial position) of the motor is 40000 pulses.

7. RS485-ID Setting Command (0x79)

7.1. Instruction Description

This command is used to set and read RS485 ID. Communication ID uses 0xCD,all devices on the bus will receive and process this command. When modifying,you need to pay attention to whether multiple devices are connected,so that the IDs of multiple devices may be modified to the same at the same time.

The host sends this command to set and read the RS485 ID,the parameters are as follows.

1. The read and write flag bit wReadWriteFlag is bool type,1 read 0 write;
2. RS485-ID,size range (#1~#32),uint16_t type (synchronized with the upper computer function),device identifier ID (1~32).

7.2. Send Data Field Definition

Data field	Description	Data
DATA[0]	Command byte	0x79
DATA[1]	NULL	0x00
DATA[2]	Read and write flags	DATA[2] = wReadWriteFlag
DATA[3]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	NULL	0x00
DATA[7]	RS485ID	DATA[7] = RS485ID(1~32)

7.3. Reply Data Field Definition

The motor replies to the host after receiving the command,which is divided into the following two situations:

1. Set RS485ID, the range is 1-32, and return to the original command;
2. Read RS485ID, the return parameters are as follows.

Data field	Description	Data
DATA[0]	Command byte	0x79
DATA[0]	NULL	0x00
DATA[0]	Read and write flags	DATA[2] = wReadWriteFlag
DATA[0]	NULL	0x00
DATA[4]	NULL	0x00
DATA[5]	NULL	0x00
DATA[6]	RS485ID low byte 1	DATA[6] = (uint8_t*)(RS485ID)
DATA[7]	RS485ID byte 2	DATA[7] = (uint8_t)(RS485ID>>8)

7.4. Communication Example

Example 1:

Send command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0xCD	0x08	0x79	0x00	0x00	0x00	0x00	0x00	0x00	0x02	CRC16L	CRC16H

Description: Data[2] = 0 means write RS485ID. Data[7] = 1 means to set the motor RS485ID to 2.

Reply command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0xCD	0x08	0x79	0x00	0x00	0x00	0x00	0x00	0x00	0x02	CRC16L	CRC16H

Description: Same as sending command.

Example 2:

Send command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H

0x3E	0xCD	0x08	0x79	0x00	0x01	0x00	0x00	0x00	0x00	0x00	CRC16L	CRC16H
------	------	------	------	------	------	------	------	------	------	------	--------	--------

Description: Data[2] = 1 means to read RS485ID.

Reply command:

Frame header	ID	Length	D0	D1	D2	D3	D4	D5	D6	D7	CRC16L	CRC16H
0x3E	0xCD	0x08	0x79	0x00	0x01	0x00	0x00	0x00	0x00	0x02	CRC16L	CRC16H

Description: Data[7] = 0x2 means that the sending ID of the motor is 0x2 and the reply ID is 0x2.

8. Indicator Light Description

8.1. Status Description

- When the indicator light is solid on, it means the motor is running normally;
- Slow flashing indicates that the motor has a secondary error. If the recovery condition is reached, it will automatically return to normal operation, and the indicator light will be solid on for a long time;
- Flickering quickly indicates that the motor has a first-level error, and the motor cannot recover from the error. It is necessary to check the motor fault and restart before it can continue to run.

8.2. Failure Description Form

Fault Name	Description	Error Level
Hardware over-current	If the motor current exceeds the limit value, there may be short circuit, phase loss, loss of control, motor damage, etc.	Level 1
Stall error	After the current reaches the stall current, the speed is very low and continues for a period of time. It indicates that the motor load is too large.	Level 1
Under-voltage error	The power input is lower than the set undervoltage value	Level 2

Over-voltage error	The power input is higher than the set overvoltage value	Level 2
Phase-current over-current	The software detects that the motor current exceeds the limit value, and there may be short circuit, phase loss, loss of control, motor damage, etc.	Level 1
Power overrun error	If the input current of the power supply exceeds the limit value, there may be a situation where the load is too large or the speed is too high.	Level 2
Calibration parameter read error	Failed to write parameters causing parameter loss.	Level 1
Over-speed error	The motor running speed exceeds the limit value, there may be over pressure and drag use.	Level 2
Motor over-temperature error	If the motor temperature exceeds the set value, there may be short circuit, parameter error, and long-term overload use.	Level 2
Encoder calibration error	The encoder calibration result deviates too much from the standard value.	Level 2

9. Version Revision Information

Version V3.1:

1) Version revision content:

a. Revise the definition of reply data in 5.0 operation control command.

2) Version revision date: 2022.6.23

Version V3.2:

1) Version revision content:

a. Add the description of indicator lights.

2) Version revision date: 2022.7.27

Version V3.3:

1) Version revision content:

a. Add function control command 0x20 a function: add CAN filter disable control function.

2) Version revision date: 2022.7.31

Version V3.4:

1) Version revision content:

a. Add position tracking instruction 0xA3;

b. In the 0x43 command, add the settings of 4 values of acceleration and deceleration for position planning and speed planning.

2) Version revision date: 2022.8.17

Version V3.5:

1) Version revision content:

a. Increase the position tracking command 0xA5 with speed limit;

b. Add function control command 0x20: error status sending and multi-turn value power-down save selection function;

c. Add the 0xB5 command to read the motor model.

2) Version revision date: 2022.9.05

Version V3.6:

1) Version revision content:

a. Increase RS485 broadcast instruction description 0xCD.

2) Version revision date: 2022.10.13

Version V3.7:

1) Version revision content:

a. Remove the A3 instruction;

b. Merge A5 into A4;

c. Add A6 single-turn position command;

d. Add the command 0x90 to read the single-turn encoder;

e. Add the command 0x94 to read the single-turn angle of the motor.

2) Version revision date: 2022.11.26

Version V3.8:

1)Version revision content:

a.The RS485 protocol baud rate of 2Mbps is modified to 2.5Mbps.

2)Version revision date:2022.11.26

Version V3.9:

1)Version revision content:

a.Add 485 serial port configuration instructions;

b.Add the function index in the 0x42 command,and you can read the acceleration and deceleration values of position and speed through the index;

c.Add 0xB6 active reply function.

2)Version revision date:2023.3.11

Version V4.0:

1)Version revision content:

a.Add the function of setting CANID in the 0x20 command;

b.Add the maximum positive angle limit value in the 0x20 command;

c.Add the maximum negative angle limit value in the 0x20 command.

2)Version revision date: 2023.10.16

Version V4.1:

1) Version revision content:

a.Modify the circleAngle of the motor to be the uint16_t type data.

2)Version revision date: 2024.2.13

Version V4.2:

1) Version revision content:

a.Modify the Read PID Parameters command (0x30) to read the PID parameters of the current,speed,and position loops using the index;

b.Modify the Write PID Parameters to RAM command (0x31),and use the index to write the PID parameters of the current loop,velocity loop,and position loop to RAM;

c.Modify the Write PID Parameters to ROM command (0x32),use the index to write the PID parameters of the current loop,speed loop and position loop to ROM.

2) Version revision date: 2024.5.28

Version V4.3:

1) Version revision content:

- a. Added force control position closed-loop control command (0xA9);
- b. Included force control mode in the speed closed-loop control command (0xA2);
- c. Improved MIT command;
- d. Added encoder data abnormal error.

2) Version revision date: 2024.5.12

